

[Click here to come back to the previous page](#)

input3d.dat

MAIN INPUT DATA FILE : 2D HEAT-DRIVEN CAVITY FLOW

DIMENSIONLESS FORM :

```


Ra= 1.D+04
Density scale    : rho_0 (fluid
density)
cavity
(k/H).Ra**0.5 (k thermal diffusivity)
hot ; Tc= T cold)
U/U0
(T-Tc)/(Th-Tc)
viscosity= Pr/Ra**0.5
diffusivity= 1/Ra**0.5
= Pr.T*
Ly/H= 1
Density scale    : rho_0 (fluid
Length scale  H : height of
Velocity scale ---> U0=
Temperature scale Th - Tc (Th= T
Dimensionless Velocity    U*=
Dimensionless Temperature T*=
dimensionless kinematic
dimensionless thermal
dimensionless buoyancy term
dimensionless domain Lx/H= 1 ,

```

Reference results (De Wahl

Davis, IJNMF , Vol 3, 1983):	
the wall : 2.243	Averaged Nusselt number at
the vertical mid-plane : 2.243	Averaged Nusselt number at
wall : 3.528	Maximum Nusselt number at the
wall : 0.586	Minimum Nusselt number at the
velocity (horizontal mid-plane) : 0.19617	Maximum value of the vertical
	Maximum value of the
horizontal velocity (vertital mid-plane) : 0.16178	

$$Q_0 = 0 \text{ (adiabatic)}$$

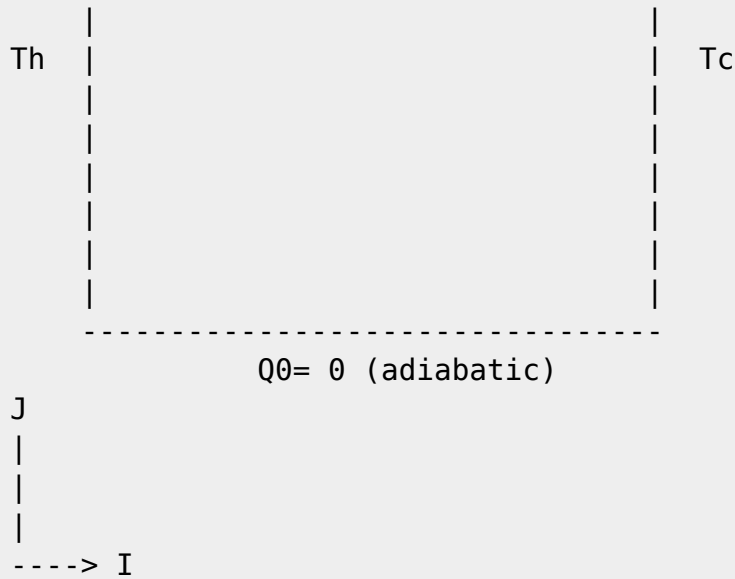

```
=====
====
=====
====
+++++
GENERAL LAYOUT
+++++
&Version File_Version="VERSION2.0"/

=====
====
                        FLUID PROPERTIES
                        (DIMENSIONLESS FORM)
=====
====
&Fluid_Properties  Heat_Transfer_Flow = .true.    ,  Reference_Density=
1.0,
                        Reference_Temperature= 1.0    ,
Reference_Dynamic_Viscosity= 0.71D-02    ,
                        Reference_Heat_Capacity= 1.0    ,
                        Prandtl = 0.71    ,
Thermal_Expansion_Coefficient= 1.0 /

=====
====
                        UNIFORM INITIALIZATION OF THE VELOCITY COMPONENTS AND TEMPERATURE
                        (DIMENSIONLESS FORM)
=====
====
&Velocity_Initialization I_Velocity_Reference_Value      = 0.0    ,
J_Velocity_Reference_Value      = 0.0    , K_Velocity_Reference_Value
= 0.0 /
```

```

&Temperature_Initialization Temperature_Reference_Value      = 0.5 /

=====
====

                GRAVITY
            (DIMENSIONLESS FORM)

=====
====

&Gravity Gravity_Enabled= .true. , Gravity_Angle_IJ= 90.0 ,
Gravity_Angle_IK= 90.0 , Reference_Gravity_Constant= 0.71/

=====
====

                DOMAIN FEATURES

=====
====

&Domain_Features Start_Coordinate_I_Direction= 0.00 ,
End_Coordinate_I_Direction= 1.00,
                    Start_Coordinate_J_Direction= 0.00 ,
End_Coordinate_J_Direction= 1.00,
                    Start_Coordinate_K_Direction= 0.00 ,
End_Coordinate_K_Direction= 0.00,
                    Cells_Number_I_Direction= 64
,Cells_Number_J_Direction=64 ,Cells_Number_K_Direction= 1,
                    Regular_Mesh= .true. /

+++++
+++++
DEFINITION OF BOUNDARY CONDITIONS
+++++
+++++

=====
=====

WALL BOUNDARY CONDITION SETUP

=====
=====

Keep in mind that the domain is enclosed by default.
No new boundary conditions are defined at the ends of the domain : the
walls by default are preserved

&Heat_Wall_Boundary_Condition_Setup
    Wall_BC_DataSetName = "Set1",
    West_Heat_BC_Option = 0 , East_Heat_BC_Option = 0 ,
    Back_Heat_BC_Option = 1 , Front_Heat_BC_Option = 1 ,
    South_Heat_BC_Option = 0 , North_Heat_BC_Option = 0,
    West_Wall_BC_Value= 1.0 , East_Wall_BC_Value= 0.0 ,
    Back_Wall_BC_Value= 0.0 , Front_Wall_BC_Value= 0.0 ,
    South_Wall_BC_Value= 0.0 , North_Wall_BC_Value= 0.0 /

=====
=====

```

```

BORDER BOUNDARY CONDITIONS : The walls located by default at the ends
of the domain remain unchanged
=====
=====
!--- No new boundary conditions are defined at the ends of the domain :
walls by default are preserved, the inlet and outlet previously are
defined above)
!--- As "None" is the default setting for this namelist, it can be
removed

&Border_Domain_Boundary_Conditions West_BC_Name= "None" , East_BC_Name=
"None" , Back_BC_Name= "None" , Front_BC_Name= "None" , North_BC_Name=
"None" , South_BC_Name= "None" /
+++++
+++++

                        NUMERICAL METHODS
+++++
+++++
&Numerical_Methods  NS_NumericalMethod= "BDF2-Scheme02"
,                    !--- BDF2 + 2nd order centered scheme
                        MomentumConvection_Scheme="Centered-02-
Conservative" ,      !--- conservative form for solving the velocity
(momentum) equation
                        Poisson_NumericalMethod="Home-SORMultigrid-
ConstantMatrixCoef" / !--- SOR + multigrid method (homemade release)
for solving the Poisson's equation with constant coefficient matrix

&HomeData_PoissonSolver SolverName="SOR" ,                    !---
Successive Over-Relaxation (SOR) method based on the red-black
algorithm
                        Relaxation_Coefficient= 1.7 ,          !---
Relaxation coefficient of the SOR method ( 1 <= Relaxation_Coefficient
< 2)
                        Number_max_Grid= 6,                    !---
Number of grid levels
                        Number_max_Cycle= 1,                    !---
Number of multigrid cycles
                        Number_Iteration_FineToCoarseGrid= 3, !---
number of SOR iterations applied on any grid level during the
restriction step (before the coarsest grid computation)
                        Number_Iteration_CoarseToFineGrid= 15, !---
number of SOR iterations applied on any grid level during the
prolongation step (after the Coarsest grid computation)
                        Number_Iteration_CoarsestGrid= 15 ,     !---
number of SOR iterations applied on the coarsest grid
                        Convergence_Criterion= 1.D-08 /         !---
convergence tolerance on the residu of the Poisson's equation

+++++
+++++

```

```

+++++++
SIMULATION MANAGEMENT
+++++++
+++++++

The numerical time step is estimated by means of the CFL coefficient

&Simulation_Management      Restart_Parameter= 0 ,
                             Steady_Flow_Stopping_Criterion_Enabled =
.true. , Steady_Flow_Stopping_Criterion = 1.D-16,
                             Temporal_Iterations_Number = 10000
, Final_Time = 5.D+02 ,
                             TimeStep_Type = 1 ,
                             Timestep_Min = 5.D-02
, Timestep_Max = 5.D-02 ,
                             CFL_Min      = 0.5
, CFL_Max      = 0.5 ,
                             Iterations_For_Timestep_Linear_Progress= 1,
                             Simulation_Backup_Rate      =
1000 , Simulation_Checking_Rate = 101 /

=====
=====
PROBES MANAGEMENT
=====
=====

      NO PROBE

=====
=====
FIELDS RECORDING SETUP
=====
=====
&Simulation_Management
      InstantaneousFields_RecordingReset=.false. ,
      InstantaneousFields_TimeRecordingRate= 5.0E+00 ,
      InstantaneousFields_RecordingStartTime= 0.D-00 /
&Field_Recording_Setup      Check_Special_Features=
"Heat_Driven_Cavity_Flow", Precision_On_Instantaneous_Fields= 2 /
Here, a special variable devoted to results of heat driven cavity flows
is active

&Instantaneous_Fields_Listing Name_of_Field = "U"      " /      First
velocity component
&Instantaneous_Fields_Listing Name_of_Field = "V"      " /      Second
velocity component
&Instantaneous_Fields_Listing Name_of_Field = "T"      " /
Temperature

```

END OF FILE

[Click here to come back to the previous page](#)

From:

<https://sunfluidh.lisn.upsaclay.fr/> - **Documentation du code de simulation numérique
SUNFLUIDH**

Permanent link:

https://sunfluidh.lisn.upsaclay.fr/doku.php?id=sunfluidh:2d_heat_driven_cavity_incomp_flow

Last update: **2020/02/03 17:43**

