


Example of inflow/outflow boundary conditions



- This example is defined for a 2D geometrical configuration. The size of the domain is 1.5×1.0 .
- The flow is homogeneous (no multi-species gas)
- An inlet is located at the down left side of the domain.
- An outlet is located at the top right side of the domain.
- Conditions are constant in time

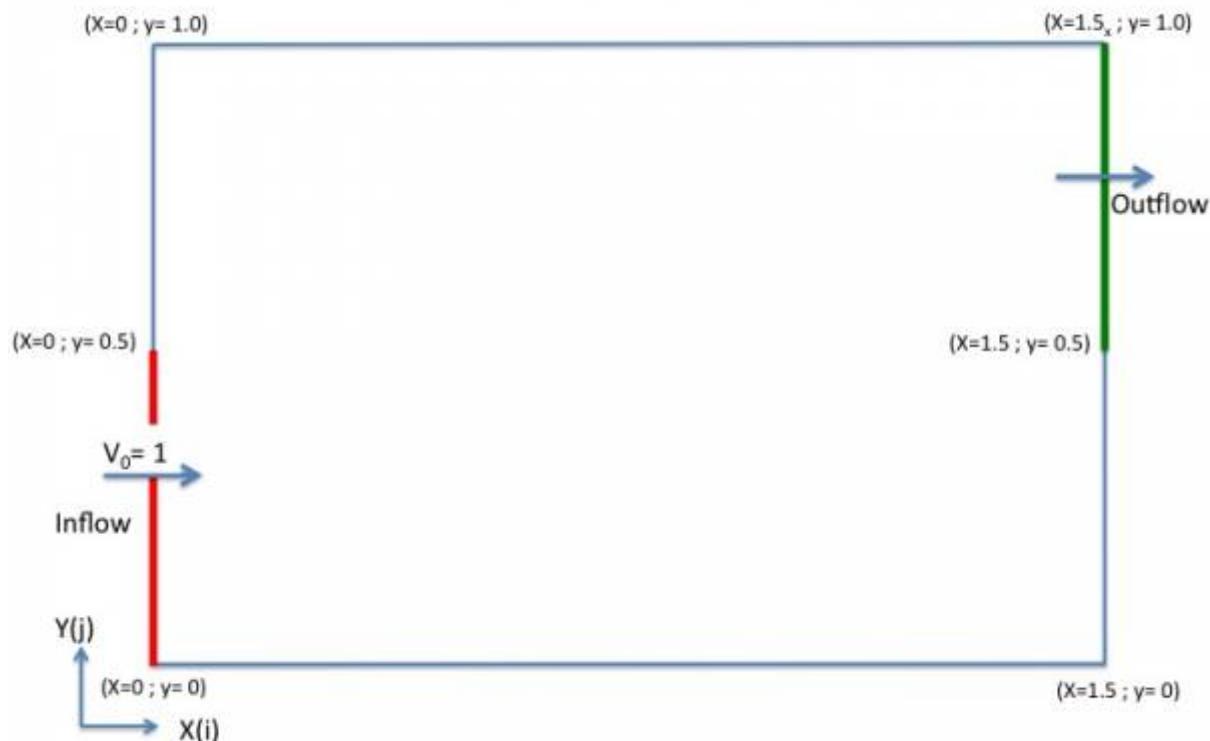

Inflow data

Example 1



- The flow is homogeneous (no multi-species gas)
- Conditions are constant in time

```
&Inlet_Boundary_Conditions
Type_of_BC= "INLET", Direction_Normal_Plan= 1 ,
Plan_Location_Coordinate= 0.0 ,
Start_Coordinate_of_First_Span = 0.0, End_Coordinate_of_First_Span = 0.5,
```

```
Start_Coordinate_of_Second_Span= 0.0 , End_Coordinate_of_Second_Span= 0.0
,
Flow_Direction= 1 ,
Normal_Velocity_Reference_Value= 1.0 ,
Temperature_Reference_Value= 293.0 ,
Density_Reference_Value= 1.2 ,
Define_Velocity_profile= 0 ,
End_of_Data_Block= .true. /
```

Example 2

Not for the release SUNFLUIDH_EDU

- 
- The flow is homogeneous (no multi-species gas)
 - The temperature and the density are constant.
 - The normal velocity component is time-dependent :
 - The function is sinusoidal. The mean value of the time function is given by "Normal_Velocity_Reference_Value".
 - the frequency is 10 Hz
 - The magnitude is 40% of the mean inlet velocity

```
&Inlet_Boundary_Conditions
Type_of_BC= "INLET", Direction_Normal_Plan= 1 ,
Plan_Location_Coordinate= 0.0 ,
Start_Coordinate_of_First_Span = 0.0, End_Coordinate_of_First_Span = 0.5,
Start_Coordinate_of_Second_Span= 0.0 , End_Coordinate_of_Second_Span= 0.0
,
Flow_Direction= 1 ,
Normal_Velocity_Reference_Value= 1.0 ,
Temperature_Reference_Value= 293.0 ,
Density_Reference_Value= 1.2 ,
Define_Velocity_profile= 0 ,
Time_Fct_Name= "Sinus" , Time_Fct_Threshold= 0.0 ,
Time_Fct_Time_Scale= 0.1 , Time_Fct_Magnitude= 0.4 ,
End_of_Data_Block= .true. /
```

Outflow data

Example 1

- 
- The outflow is based on the mass flowrate conservation.
 - The normal pressure gradient is zero (Neumann boundary condition).

&Outlet_Boundary_Conditions

```
Type_of_BC= "OUTLET", Direction_Normal_Plan= 1 ,
Plan_Location_Coordinate= 1.5 ,
Start_Coordinate_of_First_Span = 0.5 , End_Coordinate_of_First_Span =
1.0 ,
Start_Coordinate_of_Second_Span= 0.0 , End_Coordinate_of_Second_Span=
0.0 ,
Flow_Direction= 1 ,
End_of_Data_Block= .true. /
```

Example 2

Not for the release SUNFLUIDH_EDU



- The outflow is based on pressure conditions.
- The (dynamic) pressure value is given by “Pressure_Reference_Value”. It is imposed out of the domain and located at a distance “Length_Scale” from the outflow plan (Robin condition).
- Keep in mind that the pressure is here related to the dynamics, not to the thermodynamics of the flow. It is therefore defined from a reference value which can be null.

&Outlet_Boundary_Conditions

```
Type_of_BC= "FREEBC", Direction_Normal_Plan= 1 ,
Plan_Location_Coordinate= 1.5 ,
Start_Coordinate_of_First_Span = 0.5 , End_Coordinate_of_First_Span =
1.0 ,
Start_Coordinate_of_Second_Span= 0.0 , End_Coordinate_of_Second_Span=
0.0 ,
Flow_Direction= 1 ,
Pressure_Reference_Value      = 0.0 , Length_Scale= 0.2 ,
End_of_Data_Block= .true. /
```

From:

<https://sunfluidh.lisn.upsaclay.fr/> - Documentation du code de simulation numérique SUNFLUIDH

Permanent link:

https://sunfluidh.lisn.upsaclay.fr/doku.php?id=sunfluidh:inlet_outlet_boundary_conditions_examples&rev=1480350760

Last update: 2016/11/28 17:32

